
Cambridge Brass P.O. Box 249 140 Orion Place Cambridge, Ontario Canada N1R 5V1

Tel: (519) 621-5520 Fax: (519) 621-8674 http://www.cambridgebrass.com






MODEL NO. 212NL

COPPER FLARE x FEMALE IRON PIPE

STRAIGHT METER VALVE - BALL STYLE FULL PORT WITH LOCKWING

FOR COPPER TUBING x THREADED PIPE

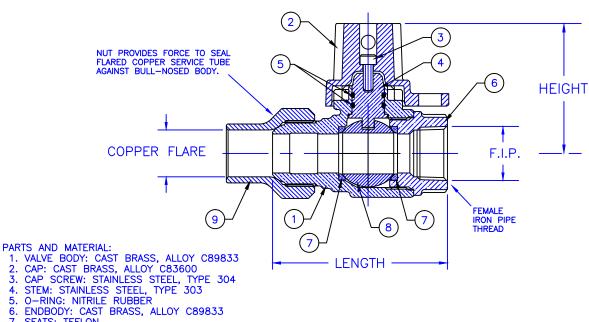

- 7. SEATS: TEFLON
 8. BALL: CAST BRASS, ALLOY C89833
 9. TAILNUT: CAST BRASS, ALLOY C83600

FEATURES:

- MANUFACTURED IN COMPLIANCE WITH AWWA STANDARD C800-05 (ASTM B-584, UNS NO C89833).
- CONFORMS TO ANSI/NSF 61-8
- CONFORMS TO ANSI/NSF 372 (COMPLIANT WITH US Safe Drinking Water Act. PL 111-380) BLOWOUT PROOF DESIGN.
 300 PSI WORKING PRESSURE.

- SOU PSI WORKING PRESSORE.

 FLOW CAN BE IN EITHER DIRECTION.

 ROTATION STOPS RESISTS 200 FT-LB TORQUE

 ENCAPSULATED LUGS UNDER CAP PROVIDE 90 DEGREE OPEN TO CLOSE OPERATION.

 HOLE FOR ATTACHING HANDLE IS PROVIDED IN CAP.

 PADLOCK WING FOR LOCKING VALVE IN CLOSED POSITION.

ORDERING INFORMATION: FULL 360 ROTATION = ADD "R" TO END OF CATALOG NO. HANDLE = ADD "H" TO END OF CATALOG NO.

Cambridge Brass considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice.

VALVE SIZE	CATALOG NO.	COPPER FLARE	F.I.P.	LENGTH	HEIGHT	APPROX. WT. LBS.
3/4"	212NL-C3F3	3/4"	3/4"	3.37"	2.50"	
3/4"	212NL-C4F3	1"	3/4"	3.67"	2.50"	
1"	212NL-C4F4	1"	1"	3.82"	2.68"	

Submitted by: