




## CORPORATION STOPS

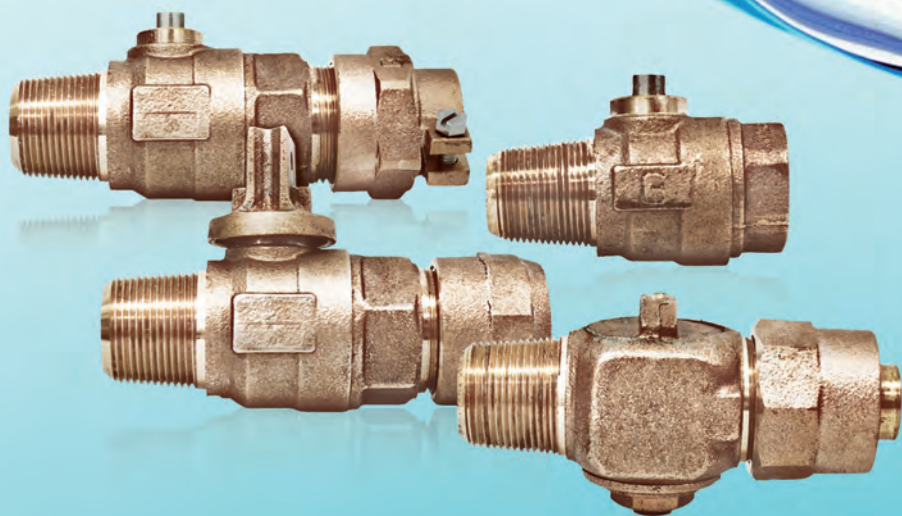

### CAMBRIDGE BRASS INC.

140 Orion Place, Cambridge, Ontario, N1R 5V1, Canada  
[www.cambridgebrass.com](http://www.cambridgebrass.com)

© 2009 Cambridge Brass Inc. JUNE/09 CAMB2011



# CORPORATION STOPS

## TABLE OF CONTENTS

Glossary of Abbreviations _____	Page	2
O.D. Chart _____	Page	2
Product Information _____	Page	3
Installation Instructions _____	Page	4
Tapping Machine Adaptor Chart _____	Page	4
Part Number Sheet _____	Page	5
Ball style Corporation Stops		
AWWA Inlet Thread _____	Pages	6-9
MIP Inlet Thread _____	Pages	10-13
Plug Style Corporation Stops		
AWWA Inlet Thread _____	Pages	14-16
MIP Inlet Thread _____	Pages	17-19
Ball Style Corporation with TEE Head		
AWWA Inlet Thread _____	Pages	20-21
MIP Inlet Thread _____	Pages	22-23
Corporation Stops (PARTS) _____	Page	24
Warranty Information _____	Page	25

# CORPORATION STOPS

## Glossary of Abbreviations

**MIP = MALE IRON PIPE THREAD**      **IPS/PEP SIZE = I.D. CONTROLLED POLYETHYLENE PIPE**  
**FIP = FEMALE IRON PIPE THREAD**  
**FCFT = FEMALE COPPER FLARE**      **PVC SIZE = POLY VINYL CHLORIDE PIPE**

### **OPTIONS:**

*All fittings in this section can be made of no lead material. To define a no lead add "NL" after series number.*



**KITEC/Q-LINE connection is available on all 3/4" & 1" size Corporation stops.**

## Outside Diameter

			1/2"	5/8"	3/4"	1"	1 1/4"	1 1/2"	2"
Poly Tubing	<b>SDR9</b>	<b>CTS</b>	.625	-	.875	1.125	1.375	1.625	2.125
Copper	<b>TYPE</b>	<b>K</b>	.625	-	.875	1.125	1.375	1.625	2.125
Poly Pipe	<b>SIDR7</b>	<b>IPS PEP</b>	-	-	1.060	1.349	1.774	2.070	2.657
PVC	<b>SCH 40, 80</b>		-	-	1.050	1.315	1.660	1.900	2.375
Gal. Pipe			-	-	1.050	1.315	1.660	1.900	2.375
KITEC/Q-LINE			-	-	.980	1.260	-	-	-
Lead Pipe		<b>Strong</b>	-	<b>1.019</b>	<b>1.156</b>	<b>1.428</b>	-	-	-
		<b>Extra Strong</b>	<b>.876</b>	<b>1.082</b>	<b>1.212</b>	<b>1.492</b>	<b>1.765</b>	<b>2.076</b>	<b>2.751</b>
		<b>Double Extra Strong</b>	<b>1.012</b>	<b>1.137</b>	<b>1.336</b>	<b>1.596</b>	-	-	-


# CORPORATION STOPS

## PRODUCT INFORMATION

all waterworks brass conforms to AWWA standard C-800


### PLUG VALVES Maximum working pressure on 1/2" thru 1" is 100 PSI

- Thick wall cast brass body
- one piece cast brass body
- square body for easy wrench grip

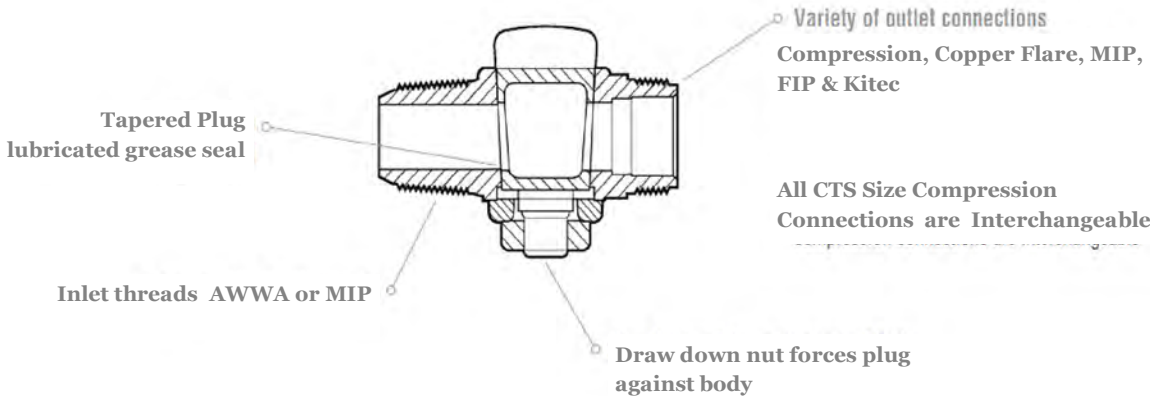

### BALL VALVES Working pressure on 1/2" thru 2" is 300 PSI

- Thick wall cast brass body
- heavy wall body to prevent distortion

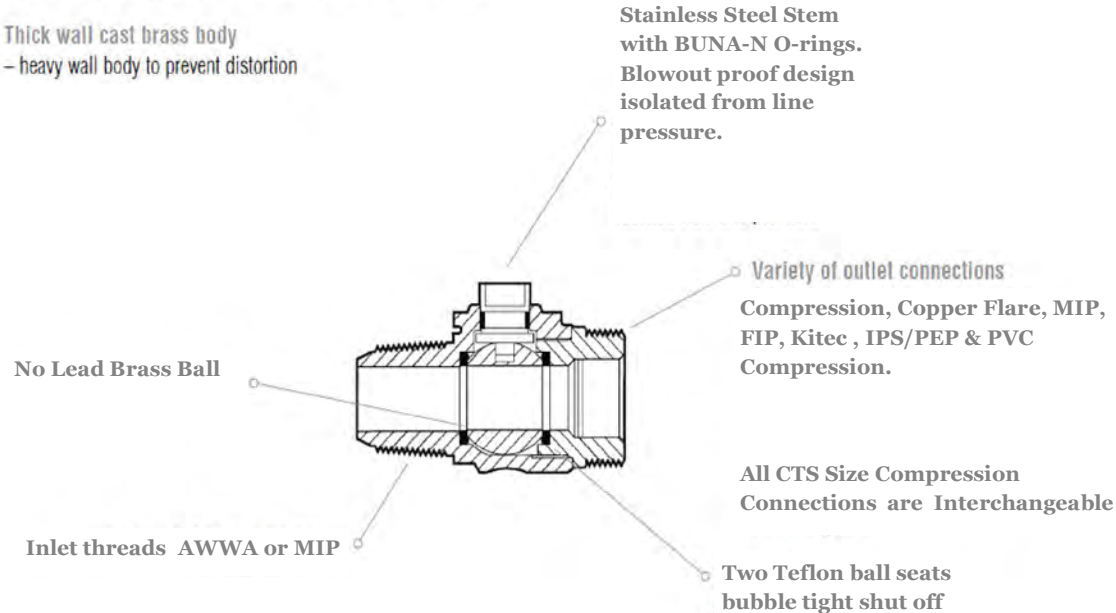

# CORPORATION STOPS

## MAINSTOP INSTALLATION- INSTRUCTIONS

Valves may be installed directly into either a dry main or a main under pressure with a standard tapping machine with or without a saddle. Consult the pipe manufacturer for their recommendation.

When direct tapping into mains, ensure that the tapping tool used is in good condition and that the tapped hole is made to the correct size. Check that the main stop inlet thread and tap are the same thread type. Always apply Teflon sealant to the valve inlet threads. A correctly installed valve will have valve inlet threads still visible.

Large wrench flats are provided on both the plug and ball style bodies for tightening and are to be used with a smooth flat jaw adjustable wrench. Careful attention must be made to fully engage the wrench with a snug fit on the valve body flats. This will ensure there are no leaks from distortion. Do not use a pipe wrench as this may distort the valve body. Do not over tighten as this may also damage the valve.

When using a tapping machine adaptor to tighten the valve in place, ensure the correct adaptor is used, and the adaptor threads match the outlet threads (see Tapping Machine Adaptor chart below)


### DRILLING MACHINE ADAPTORS FOR ALL STYLES OF CAMBRIDGE MAINSTOPS

		Drilling and Tapping Machines										
Outlet Code	Outlet Size	Mueller					Ford	Hays			Romac	Footage
		B100 B101	No. B	No. A2 No. A3	No. E4 No. E5	No. D4 No. D5	Model 77	No. 5930	No. 5935	No. B-1	Tapmate TOO	Mini-Tap XL T752
B, GJ, H & J	¾"	680600	680600	680600	52019	37902	DMA2-3	354-05-506	355-05-506	353-06-106	351-05-506	T752-20
	1"	680601	680601	680601	36750	37903	DMA2-4	354-05-508	355-05-508	353-06-108	351-05-508	T752-21
	1 ¼"	680602	-	680602	45385	37904	DMA2-5	354-05-510	355-05-510	353-06-110	351-05-510	T752-22
	1 ½"	-	-	680421	501949	507644	DMA4-6-Q	-	355-05-712	-	351-05-712	T752-42
	2"	-	-	680422	508199	507645	DMA4-7-Q	-	355-05-716	-	351-05-716	T752-43
Copper Flare C	¾"	680600	680600	680600	52019	37902	DMA2-3	354-05-506	355-05-506	353-06-106	351-05-506	T752-20
	1"	680601	680601	680601	36750	37903	DMA2-4	354-05-508	355-05-508	353-06-108	351-05-508	T752-21
	1 ¼"	680602	-	680602	45385	37904	DMA2-5	354-05-510	355-05-510	353-06-110	351-05-510	T752-22
	1 ½"	-	-	88640	501947	37905	DMA2-6	-	355-05-512	-	351-05-512	T752-23
	2"	680601	680601	680601	36750	37903	DMA2-4	354-05-508	355-05-508	353-06-108	351-05-508	T752-21
PE & PJ	1"	680602	-	680602	45385	37904	DMA2-5	354-05-510	355-05-510	353-06-110	351-05-510	T752-22
	1 ¼"	-	-	680421	501949	507644	DMA4-6-Q	-	355-05-712	-	351-05-712	T752-42
	1 ½"	-	-	680422	508199	507645	DMA4-7-Q	-	355-05-716	-	351-05-716	T752-43
	2"	-	-	88641	508201	37906	DMA2-7	-	Not Req'd	-	351-06-516	T752-24
	¾"	680631	680631	680631	36919	36910	DMA1-3	354-05-406	355-05-406	353-06-306	351-05-406	-
MIP M	1"	680632	680632	680632	36917	36911	DMA1-4	354-05-408	355-05-408	353-06-308	351-05-408	-
	1 ¼"	-	-	-	36928	36912	DMA1-5	354-05-410	355-05-410	-	351-05-410	-
	1 ½"	-	-	-	501948	36913	DMA1-6	-	355-05-412	-	351-05-412	-
	2"	-	-	-	508200	36525	DMA1-7	-	355-05-416	-	351-05-416	-
	¾"	680595	680595	680595	36920	33556	-	354-05-606	-	353-06-406	351-05-606	-
FIP F	1"	680596	680596	680596	36918	36323	-	354-05-608	-	353-06-408	351-05-608	-
	1 ¼"	680597	680597	680597	36733	36195	-	354-05-610	-	-	351-05-610	-
	1 ½"	-	-	-	503435	36196	DMA8-6	-	-	-	351-05-612	-
	2"	-	-	-	78907	36188	DMA8-7	-	-	-	351-05-616	-
	¾"	-	-	680654	-	-	-	-	-	-	-	-
Internal Drive ID	1"	-	-	680655	-	-	-	-	-	-	-	-
	1 ¼"	-	-	-	-	-	-	-	-	-	-	-
	1 ½"	-	-	58483	-	-	DMA1-67	-	-	-	-	-
	2"	-	-	58484	-	-	DMA1-78	-	-	-	-	-

# CORPORATION STOPS

## PART NUMBERING SHEET

### (EXAMPLE)

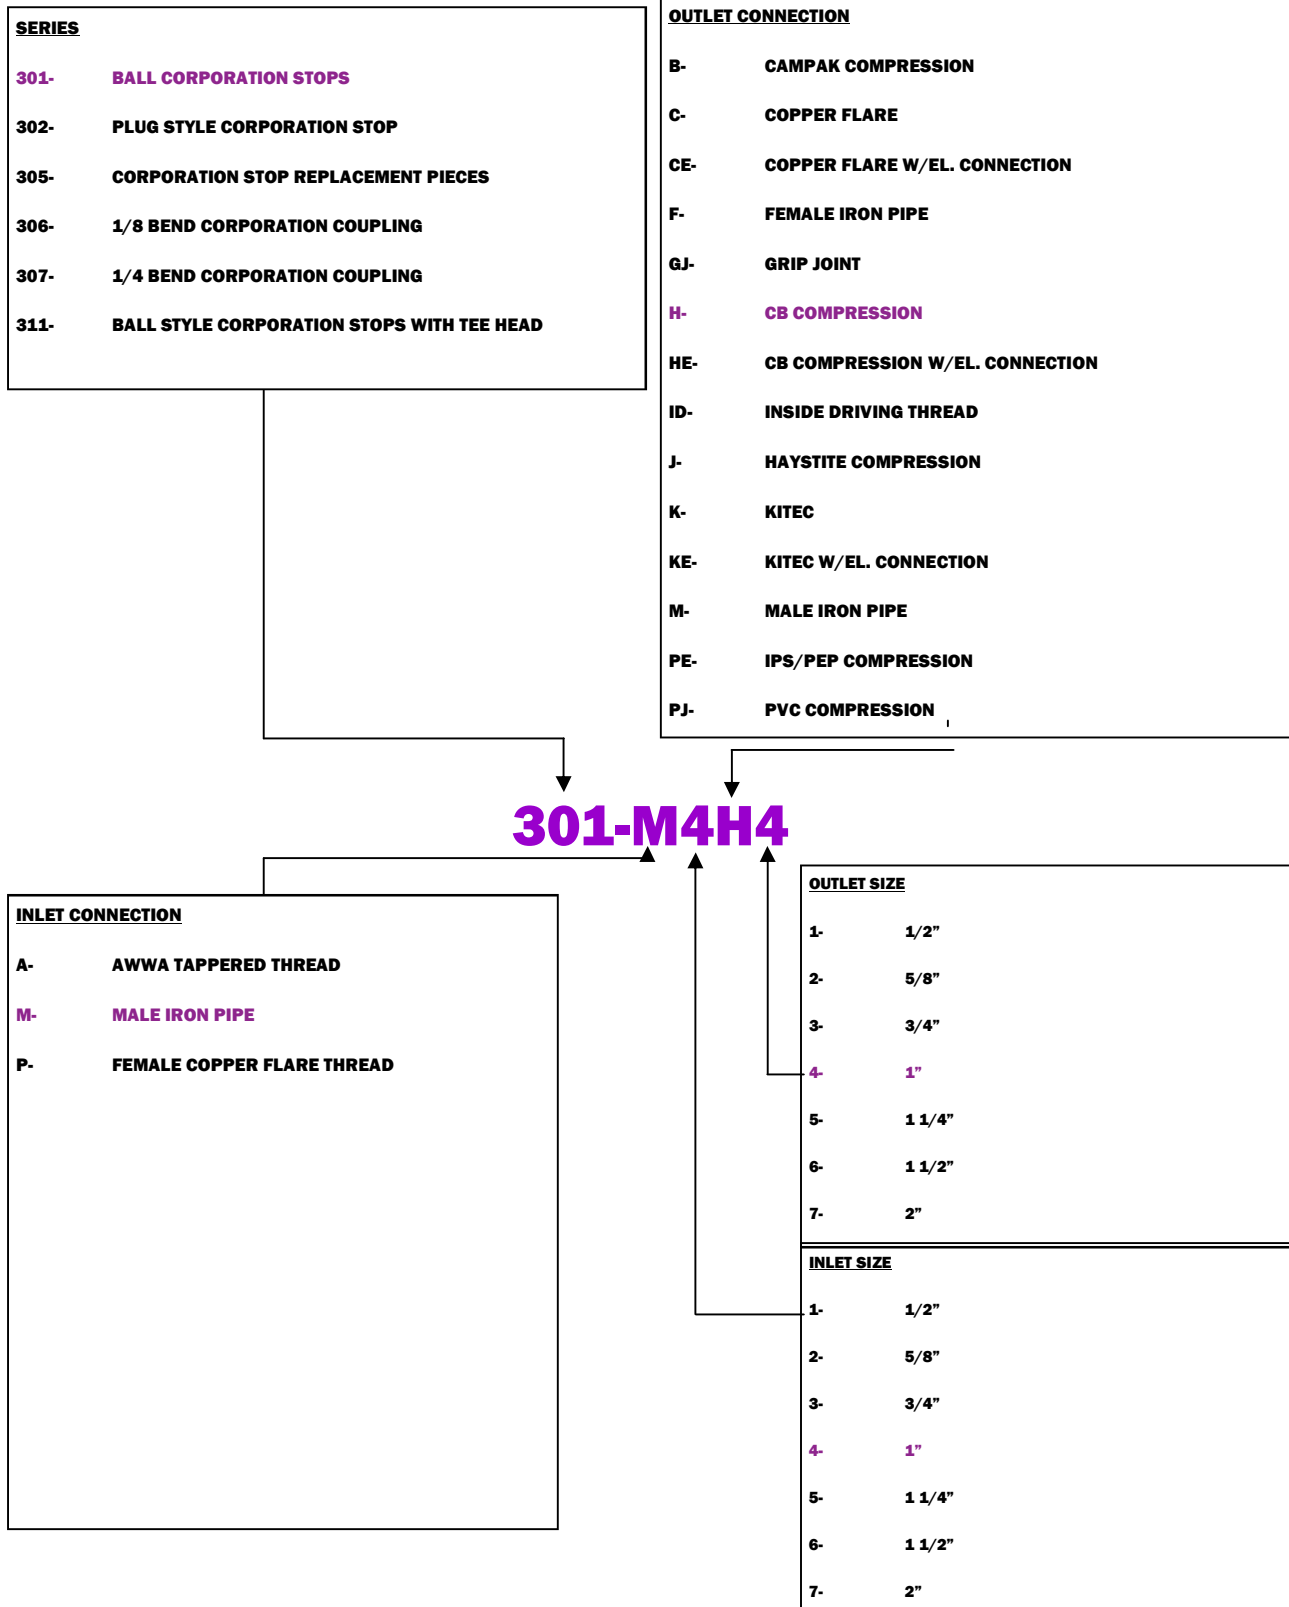


FOR NO LEAD PART NUMBER ADD NL TO END OF SERIES NUMBER

# CORPORATION STOPS


## BALL STYLE

### AWWA x CAMPAK

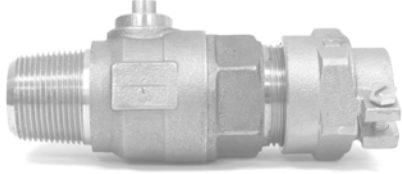


PART NUMBER	INLET AWWA	OUTLET CAMPAK	WT. EACH	BOX QTY.
301-A1B1	1/2"	1/2"	1.1	20
301-A3B3	3/4"	3/4"	1.8	10
301-A4B4	1"	1"	2.7	6
301-A6B6	1 1/2"	1 1/2"	7.6	2
301-A6B7	1 1/2"	2"	7.0	2
301-A7B7	2"	2"	10.2	2

### AWWA x COPPER FLARE

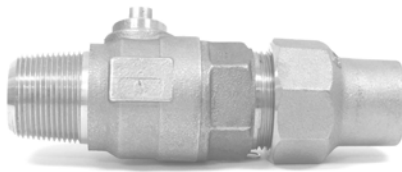


PART NUMBER	INLET AWWA	OUTLET COPPER FLARE	WT. EACH	BOX QTY.
301-A1C1	1/2"	1/2"	1.1	20
301-A3C3	3/4"	3/4"	1.9	10
301-A4C4	1"	1"	2.9	6
301-A5C5	1 1/4"	1 1/4"	8.4	2
301-A6C6	1 1/2"	1 1/2"	8.5	2
301-A7C7	2"	2"	12.8	2

### AWWA x COPPER FLARE ELECTRICAL CONNECTION

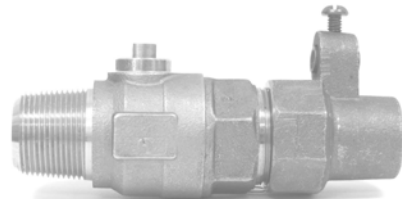

PART NUMBER	INLET AWWA	OUTLET COPPER FLARE EL.	WT. EACH	BOX QTY.
301-A3CE3	3/4"	3/4"	1.9	10
301-A4CE4	1"	1"	2.9	6

### AWWA x FIP

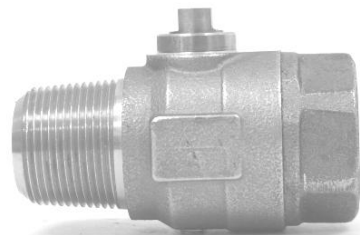


PART NUMBER	INLET AWWA	OUTLET FIP	WT. EACH	BOX QTY.
301-A3F3	3/4"	3/4"	1.7	15
301-A4F4	1"	3/4"	2.0	8
301-A5F5	1 1/4"	1 1/4"	5.8	2
301-A6F6	1 1/2"	1 1/2"	6.0	2
301-A7F7	2"	2"	8.7	2

\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING

# CORPORATION STOPS


## BALL STYLE

### AWWA x GRIPJOINT

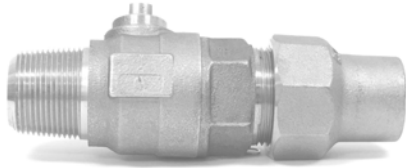


PART NUMBER	INLET AWWA	OUTLET GRIPJOINT	WT. EACH	BOX QTY.
301-A3GJ3	3/4"	3/4"	1.7	15
301-A4GJ4	1"	1"	2.9	6

### AWWA x CB COMPRESSION

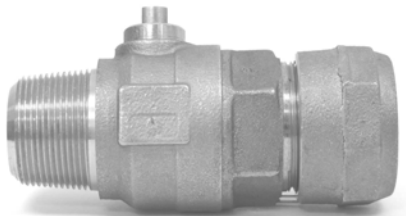

PART NUMBER	INLET AWWA	OUTLET CB COMPRESSION	WT. EACH	BOX QTY.
301-A3H3	3/4"	3/4"	1.8	15
301-A4H4	1"	1"	2.8	6
301-A5H5	1 1/4"	1 1/4"	8.2	2
301-A6H6	1 1/2"	1 1/2"	7.5	2
301-A6H7	1 1/2"	2"	8.2	2
301-A7H7	2"	2"	10.6	2

### AWWA x CB COMPRESSION ELECTRICAL CONNECTION

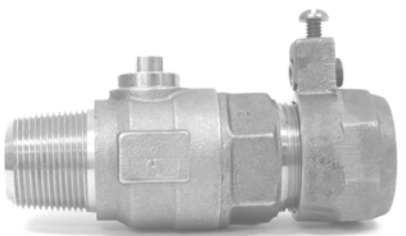

PART NUMBER	INLET AWWA	OUTLET CB COMPRESSION EL	WT. EACH	BOX QTY.
301-A3HE3	3/4"	3/4"	2.0	10
301-A4HE4	1"	1"	3.0	6
301-A6HE6	1 1/2"	1 1/2"	8.0	2
301-A6HE7	1 1/2"	2"	8.9	2
301-A7HE7	2"	2"	11.2	2


\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING



# CORPORATION STOPS


## BALL STYLE

### AWWA x CB COMPRESSION INSULATED

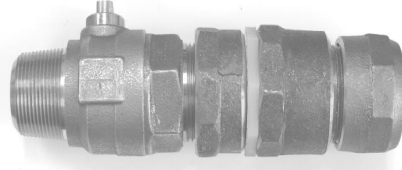

PART NUMBER	INLET AWWA	OUTLET CB INSULATED	WT. EACH	BOX QTY.
301-A3HI3	3/4"	3/4"	1.6	10
301-A4HI4	1"	1"	2.4	6
301-A6HI6	1 1/2"	1 1/2"	6.6	2
301-A7HI7	2"	2"	10.3	2


### AWWA x INSIDE DRIVING THREAD

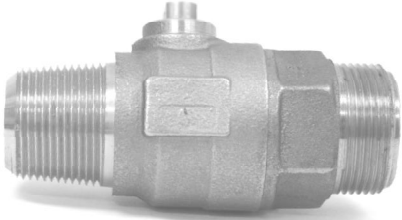

PART NUMBER	INLET AWWA	OUTLET INSIDE DRIVING THREAD	WT. EACH	BOX QTY.
301-A3ID3	3/4"	3/4"	1.6	10
301-A4ID4	1"	1"	2.4	6
301-A6ID6	1 1/2"	1 1/2"	6.6	2
301-A7ID7	2"	2"	10.3	2



### AWWA x HAYSTITE

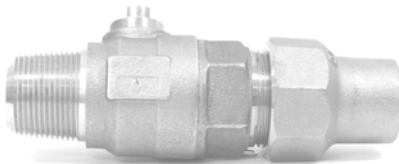

PART NUMBER	INLET AWWA	OUTLET HAYSTITE	WT. EACH	BOX QTY.
301-A3J3	3/4"	3/4"	1.7	15
301-A4J4	1"	1"	2.7	6

### AWWA x KITEC



PART NUMBER	INLET AWWA	OUTLET KITEC	WT. EACH	BOX QTY.
301-A3K3	3/4"	3/4"	1.9	10
301-A4K4	1"	1"	2.9	8

\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING

# CORPORATION STOPS


## BALL STYLE

### AWWA x KITEC ELECTRICAL CONNECTION




PART NUMBER	INLET AWWA	OUTLET KITEC EL	WT. EACH	BOX QTY.
301-A3KE3	3/4"	3/4"	2.1	10
301-A4KE4	1"	1"	3.1	8

### AWWA x MIP

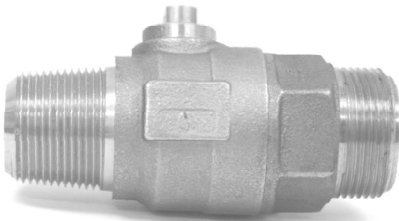


PART NUMBER	INLET AWWA	OUTLET MIP	WT. EACH	BOX QTY.
301-A1M1	1/2"	1/2"	0.8	20
301-A3M3	3/4"	3/4"	1.4	15
301-A4M4	1"	1"	2.2	6
301-A5M5	1 1/4"	1 1/4"	6.4	2
301-A6M6	1 1/2"	1 1/2"	6.4	2
301-A6M7	1 1/2"	2"	7.2	2
301-A7M7	2"	2"	9.3	2

### AWWA x IPS/PEP SIZE COMPRESSION

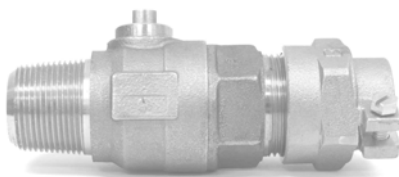

PART NUMBER	INLET AWWA	OUTLET IPS/PEP SIZE	WT. EACH	BOX QTY.
301-A3PE3	3/4"	3/4"		
301-A4PE4	1"	1"		
301-A5PE5	1 1/4"	1 1/4"		
301-A6PE6	1 1/2"	1 1/2"		
301-A7PE7	2"	2"		

### AWWA x PVC COMPRESSION

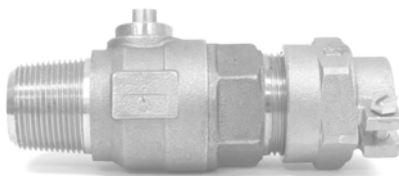

PART NUMBER	INLET AWWA	OUTLET PVC SIZE	WT. EACH	BOX QTY.
301-A3PJ3	3/4"	3/4"		
301-A4PJ4	1"	1"		
301-A6PJ6	1 1/2"	1 1/2"		
301-A7PJ7	2"	2"		


\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING



# CORPORATION STOPS


## BALL STYLE

### MIP x CAMPAK

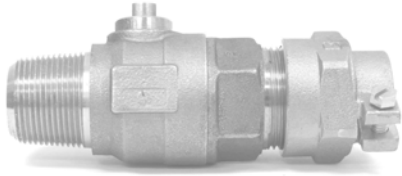


PART NUMBER	INLET MIP	OUTLET CAMPAK	WT. EACH	BOX QTY.
301-M3B3	3/4"	3/4"	1.8	10
301-M4B4	1"	1"	2.7	6
301-M6B6	1 1/2"	1 1/2"	7.6	2
301-M6B7	1 1/2"	2"	7.0	2
301-M7B7	2"	2"	10.0	2

### MIP x COPPER FLARE

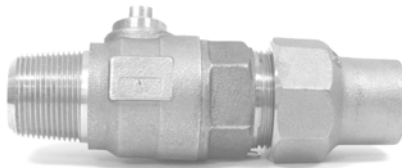


PART NUMBER	INLET MIP	OUTLET CAMPAK	WT. EACH	BOX QTY.
301-M3C3	3/4"	3/4"	1.8	10
301-M4C4	1"	1"	2.8	6
301-M5C5	1 1/4"	1 1/4"	8.4	2
301-M6C6	1 1/2"	1 1/2"	8.3	2
301-M7C7	2"	2"	12.6	1

### MIP x COPPER FLARE ELECTRICAL CONNECTION

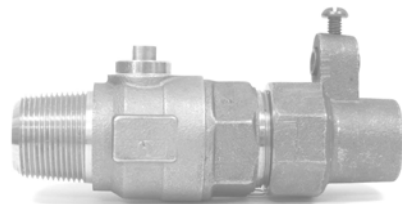

PART NUMBER	INLET MIP	OUTLET COPPER FLARE EL.	WT. EACH	BOX QTY.
301-M3CE3	3/4"	3/4"	2.1	10
301-M4CE4	1"	1"	3.1	6

### MIP x FIP

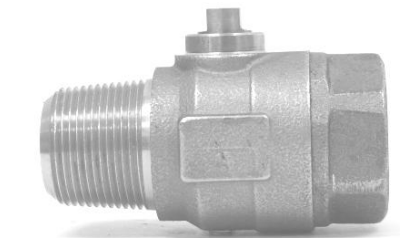


PART NUMBER	INLET MIP	OUTLET FIP	WT. EACH	BOX QTY.
301-M3F3	3/4"	3/4"	1.3	15
301-M4F4	1"	1"	1.9	10
301-M5F5	1 1/4"	1 1/4"	5.7	2
301-M6F6	1 1/2"	1 1/2"	5.8	2
301-M7F7	2"	2"	8.3	2

\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING

# CORPORATION STOPS


## BALL STYLE

### MIP x GRIPJOINT

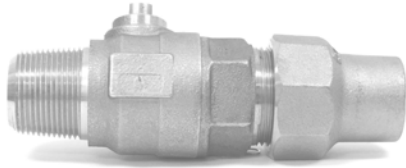


PART NUMBER	INLET MIP	OUTLET GRIPJOINT	WT. EACH	BOX QTY.
301-M3GJ3	3/4"	3/4"	1.7	15
301-M4GJ4	1"	1"	2.9	6

### MIP x CB COMPRESSION

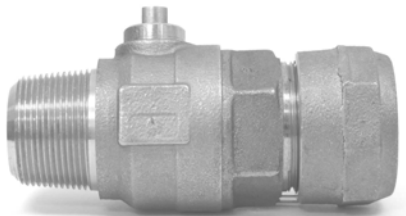

PART NUMBER	INLET MIP	OUTLET CB COMPRESSION	WT. EACH	BOX QTY.
301-M3H3	3/4"	3/4"	1.8	15
301-M4H4	1"	1"	2.7	6
301-M5H5	1 1/4"	1 1/4"	8.3	2
301-M6H6	1 1/2"	1 1/2"	7.2	2
301-M6H7	1 1/2"	2"	8.3	2
301-M7H7	2"	2"	10.2	2

### MIP x CB COMPRESSION ELECTRICAL CONNECTION

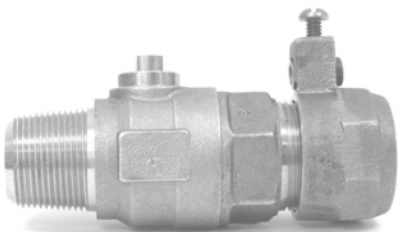


PART NUMBER	INLET MIP	OUTLET CB COMPRESSION EL	WT. EACH	BOX QTY.
301-M3HE3	3/4"	3/4"	2.0	10
301-M4HE4	1"	1"	3.0	6
301-M6HE6	1 1/2"	1 1/2"	8.0	2
301-M6HE7	1 1/2"	2"	8.9	2
301-M7HE7	2"	2"	11.2	2

\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING

# CORPORATION STOPS


## BALL STYLE

### MIP x INSIDE DRIVING THREAD

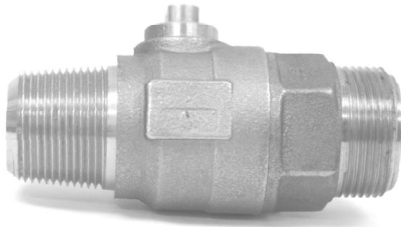

PART NUMBER	INLET MIP	OUTLET INSIDE DRIVING THREAD	WT. EACH	BOX QTY.
301-M3ID3	3/4"	3/4"	1.6	10
301-M4ID4	1"	1"	2.4	6
301-M6ID6	1 1/2"	1 1/2"	6.6	2
301-M7ID7	2"	2"	10.3	2

### MIP x HAYSTITE

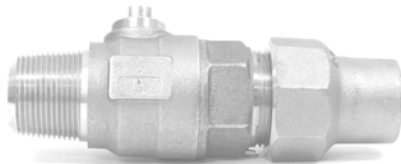


PART NUMBER	INLET MIP	OUTLET HAYSTITE	WT. EACH	BOX QTY.
301-M3J3	3/4"	3/4"	1.9	15
301-M4J4	1"	1"	2.7	6

### MIP x KITEC



PART NUMBER	INLET MIP	OUTLET KITEC	WT. EACH	BOX QTY.
301-M3K3	3/4"	3/4"	1.7	10
301-M4K4	1"	1"	2.8	8

### MIP x KITEC ELECTRICAL CONNECTION

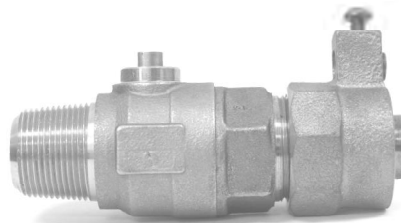


PART NUMBER	INLET MIP	OUTLET KITEC EL	WT. EACH	BOX QTY.
301-M3KE3	3/4"	3/4"	2.1	10
301-M4KE4	1"	1"	3.1	8

\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING

# CORPORATION STOPS


## BALL STYLE

### MIP x MIP

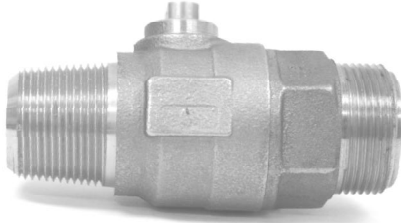

PART NUMBER	INLET AWWA	OUTLET MIP	WT. EACH	BOX QTY.
301-M3M3	3/4"	3/4"	1.4	10
301-M4M4	1"	1"	1.5	6
301-M5M5	1 1/4"	1 1/4"	6.4	2
301-M6M6	1 1/2"	1 1/2"	6.3	2
301-M6M7	1 1/2"	2"	7.2	2
301-M7M7	2"	2"	8.8	2


### MIP x IPS/PEP SIZE COMPRESSION

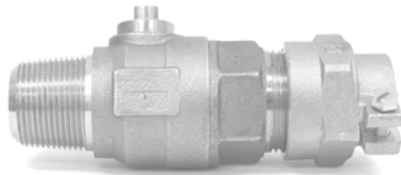

PART NUMBER	INLET AWWA	OUTLET IPS/PEP SIZE	WT. EACH	BOX QTY.
301-M3PE3	3/4"	3/4"		
301-M4PE4	1"	1"		
301-M5PE5	1 1/4"	1 1/4"		
301-M6PE6	1 1/2"	1 1/2"		
301-M7PE7	2"	2"		



### MIP x PVC COMPRESSION

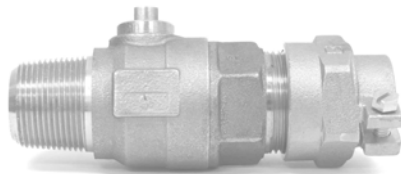

PART NUMBER	INLET MIP	OUTLET PVC SIZE	WT. EACH	BOX QTY.
301-M3PJ3	3/4"	3/4"		
301-M4PJ4	1"	1"		
301-M6PJ6	1 1/2"	1 1/2"		
301-M7PJ7	2"	2"		




\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING

# CORPORATION STOPS


## PLUG STYLE

### AWWA x CAMPAK

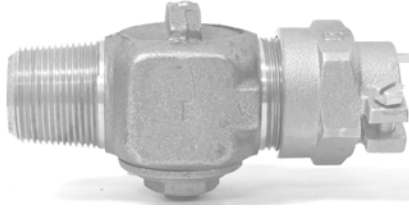


PART NUMBER	INLET AWWA	OUTLET CAMPAK	WT. EACH	BOX QTY.
302-A3B3	3/4"	3/4"	1.7	12
302-A3B4	3/4"	1"	2.2	10
302-A4B4	1"	1"	2.8	6

### AWWA x COPPER FLARE

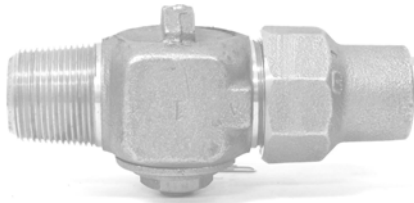


PART NUMBER	INLET AWWA	OUTLET COPPER FLARE	WT. EACH	BOX QTY.
302-A1C1	1/2"	1/2"	1.6	12
302-A3C3	3/4"	3/4"	1.8	10
302-A4C4	1"	1"	3.0	5

### AWWA x COPPER FLARE ELECTRICAL CONNECTION

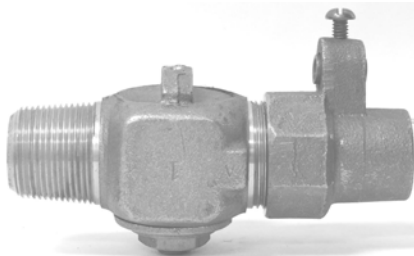

PART NUMBER	INLET AWWA	OUTLET COPPER FLARE EL	WT. EACH	BOX QTY.
302-A3CE3	3/4"	3/4"	2.0	10
302-A4CE4	1"	1"	3.2	5

### AWWA x FIP

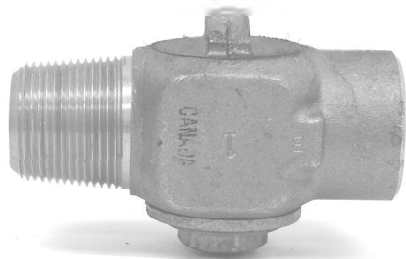


PART NUMBER	INLET AWWA	OUTLET FIP	WT. EACH	BOX QTY.
302-A1F1	1/2"	1/2"	0.9	25
302-A3F3	3/4"	3/4"	1.4	15
302-A4F4	1"	1"	2.5	8

\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING

# CORPORATION STOPS


## PLUG STYLE

### AWWA x GRIPJOINT

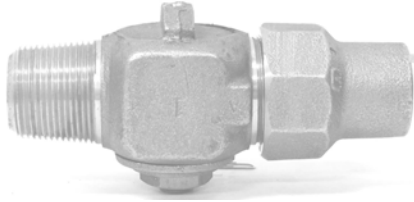

PART NUMBER	INLET AWWA	OUTLET GRIPJOINT	WT. EACH	BOX QTY.
302-A3GJ3	3/4"	3/4"	1.7	12
302-A3GJ4	3/4"	1"	2.2	10
302-A4GJ4	1"	1"	3.0	6

### AWWA x CB COMPRESSION

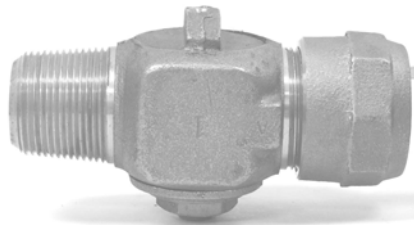


PART NUMBER	INLET AWWA	OUTLET CB COMPRESSION	WT. EACH	BOX QTY.
302-A3H3	3/4"	3/4"	1.7	12
302-A3H4	3/4"	1"	2.2	10
302-A4H4	1"	1"	2.9	6

### AWWA X CB COMPRESSION INSULATED



PART NUMBER	INLET AWWA	OUTLET CB COMPRESSION INSULATED	WT. EACH	BOX QTY.
302-A3H3I	3/4"	3/4"		5
302-A4H4I	1"	1"		5

### AWWA x CB COMPRESSION ELECTRICAL CONNECTION

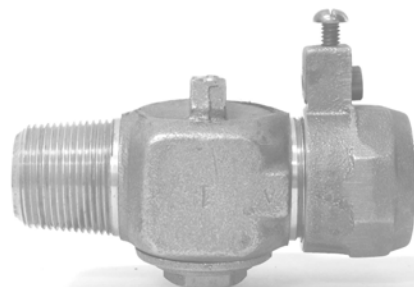

PART NUMBER	INLET AWWA	OUTLET CB COMPRESSION EL	WT. EACH	BOX QTY.
302-A3HE3	3/4"	3/4"	2.0	10
302-A3HE4	3/4"	1"	2.5	10
302-A4HE4	1"	1"	3.0	6


\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING



# CORPORATION STOPS


## PLUG STYLE

### AWWA x HAYSTITE

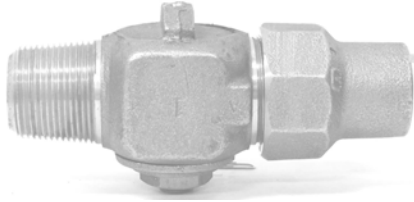


PART NUMBER	INLET AWWA	OUTLET HAYSTITE	WT. EACH	BOX QTY.
302-A3J3	3/4"	3/4"	1.7	12
302-A3J4	3/4"	1"	1.9	10
302-A4J4	1"	1"	2.9	6

### AWWA x KITEC

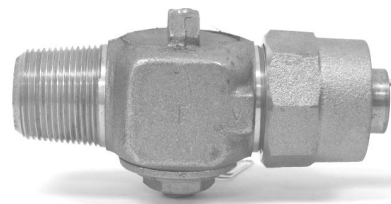


PART NUMBER	INLET AWWA	OUTLET KITEC	WT. EACH	BOX QTY.
302-A3K3	3/4"	3/4"	1.8	10
302-A3K4	3/4"	1"	2.3	8
302-A4K4	1"	1"	3.0	6

### AWWA x KITEC ELECTRICAL CONNECTION

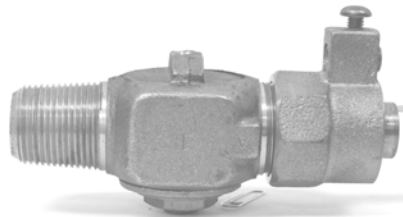

PART NUMBER	INLET AWWA	OUTLET KITEC EL	WT. EACH	BOX QTY.
302-A3KE3	3/4"	3/4"	2.0	10
302-A3KE4	3/4"	1"	2.5	8
302-A4KE4	1"	1"	3.2	5

### AWWA x MIP

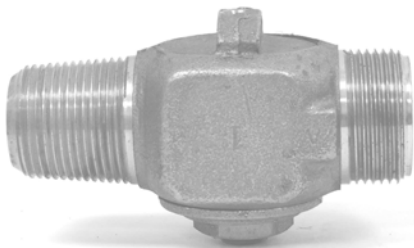


PART NUMBER	INLET AWWA	OUTLET MIP	WT. EACH	BOX QTY.
302-A3M3	3/4"	3/4"	1.4	12
302-A4M4	1"	1"	2.2	8

\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING

# CORPORATION STOPS


## PLUG STYLE

### MIP x CAMPAK

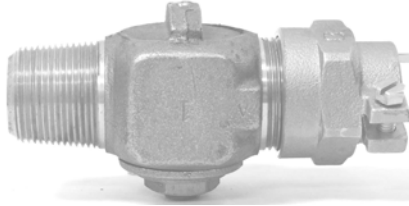


PART NUMBER	INLET MIP	OUTLET CAMPAK	WT. EACH	BOX QTY.
302-M3B3	3/4"	3/4"	1.6	12
302-M3B4	3/4"	1"	2.2	10
302-M4B4	1"	1"	2.8	6

### MIP x COPPER FLARE

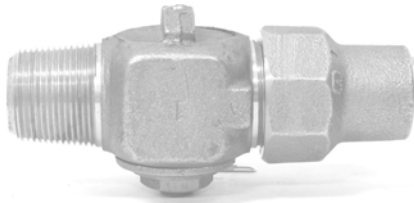


PART NUMBER	INLET MIP	OUTLET COPPER FLARE	WT. EACH	BOX QTY.
302-M1C1	1/2"	1/2"	1.6	12
302-M3C3	3/4"	3/4"	1.7	10
302-M4C4	1"	1"	2.9	5

### MIP x COPPER FLARE ELECTRICAL CONNECTION

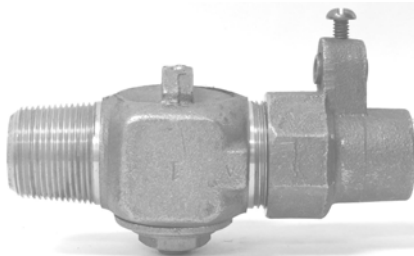

PART NUMBER	INLET MIP	OUTLET COPPER FLARE EL	WT. EACH	BOX QTY.
302-M3CE3	3/4"	3/4"	2.0	10
302-M4CE4	1"	1"	3.2	5

### MIP x FIP

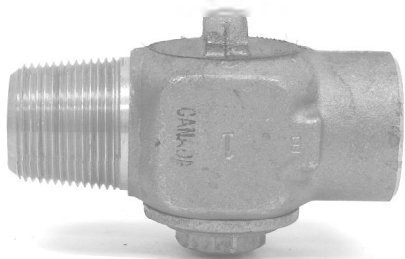


PART NUMBER	INLET MIP	OUTLET FIP	WT. EACH	BOX QTY.
302-M1F1	1/2"	1/2"	0.9	25
302-M3F3	3/4"	3/4"	1.3	15
302-M4F4	1"	1"	2.3	8

\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING

# CORPORATION STOPS


## PLUG STYLE

### MIP x GRIPJOINT

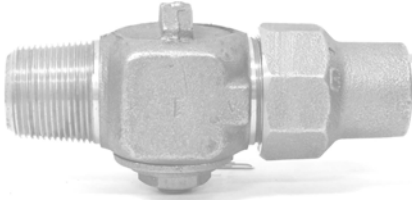

PART NUMBER	INLET MIP	OUTLET GRIPJOINT	WT. EACH	BOX QTY.
302-M3GJ3	3/4"	3/4"	1.6	12
302-M3GJ4	3/4"	1"	2.1	10
302-M4GJ4	1"	1"	2.8	6

### MIP x CB COMPRESSION

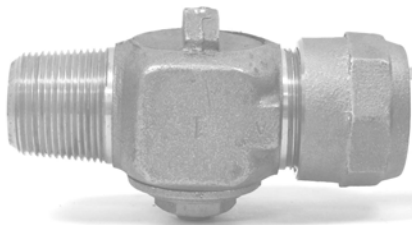


PART NUMBER	INLET MIP	OUTLET CB COMPRESSION	WT. EACH	BOX QTY.
302-M3H3	3/4"	3/4"	1.6	12
302-M3H4	3/4"	1"	2.1	10
302-M4H4	1"	1"	2.8	6

### MIP x CB COMPRESSION INSULATED



PART NUMBER	INLET MIP	OUTLET CB COMPRESSION INSULATED	WT. EACH	BOX QTY.
302-M3H3I	3/4"	3/4"		5
302-M4H4I	1"	1"		5

### MIP x CB COMPRESSION ELECTRICAL CONNECTION

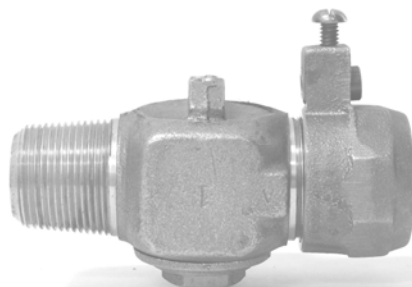


PART NUMBER	INLET MIP	OUTLET CB COMPRESSION EL	WT. EACH	BOX QTY.
302-A3HE3	3/4"	3/4"	2.0	12
302-A3HE4	3/4"	1"	2.5	10
302-A4HE4	1"	1"	3.0	6

\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING

# CORPORATION STOPS


## PLUG STYLE

### MIP x HAYSTITE

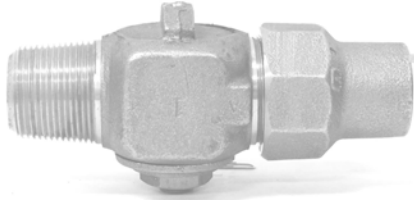


PART NUMBER	INLET MIP	OUTLET HAYSTITE	WT. EACH	BOX QTY.
302-M3J3	3/4"	3/4"	1.7	12
302-M3J4	3/4"	1"	1.9	10
302-M4J4	1"	1"	2.6	6

### MIP x KITEC

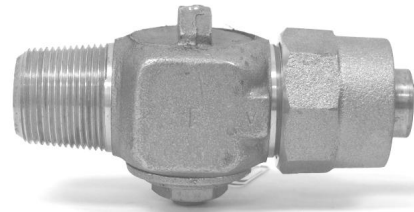


PART NUMBER	INLET MIP	OUTLET KITEC	WT. EACH	BOX QTY.
302-M3K3	3/4"	3/4"	1.8	10
302-M3K4	3/4"	1"	2.3	8
302-M4K4	1"	1"	3.0	6

### MIP x KITEC ELECTRICAL CONNECTION

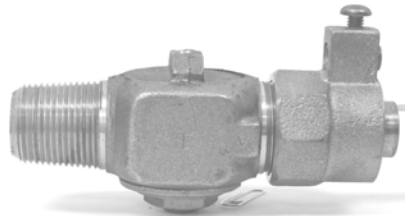

PART NUMBER	INLET MIP	OUTLET KITEC EL	WT. EACH	BOX QTY.
302-M3KE3	3/4"	3/4"	2.0	10
302-M3KE4	3/4"	1"	2.5	8
302-M4KE4	1"	1"	3.2	5

### MIP x MIP

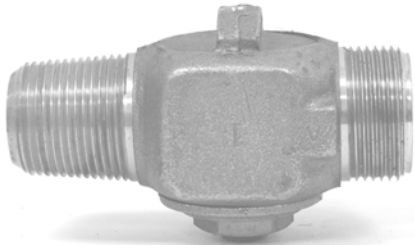


PART NUMBER	INLET MIP	OUTLET MIP	WT. EACH	BOX QTY.
302-M3M3	3/4"	3/4"	1.3	12
302-M4M4	1"	1"	2.3	8

\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING

# CORPORATION STOPS


## BALL STYLE WITH TEE HEAD

### AWWA x CAMPAK

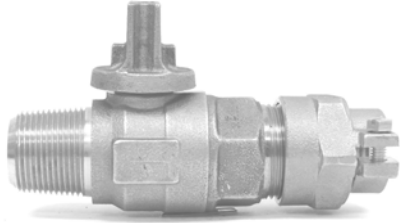


PART NUMBER	INLET AWWA	OUTLET CAMPAK	WT. EACH	BOX QTY.
311-A3B3	3/4"	3/4"	2.3	10
311-A4B4	1"	1"	3.2	6
311-A6B6	1 1/2"	1 1/2"	8.1	2
311-A6B7	1 1/2"	2"	7.5	2
311-A7B7	2"	2"	10.7	2

### AWWA x COPPER FLARE

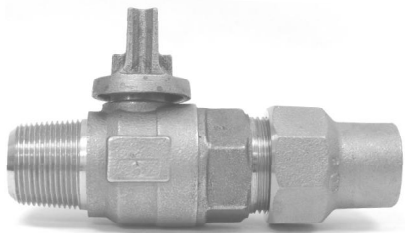


PART NUMBER	INLET AWWA	OUTLET COPPER FLARE	WT. EACH	BOX QTY.
311-A3C3	3/4"	3/4"	2.4	10
311-A4C4	1"	1"	3.4	6
311-A6C6	1 1/2"	1 1/2"	9.0	2
311-A7C7	2"	2"	13.3	2

### AWWA x FIP

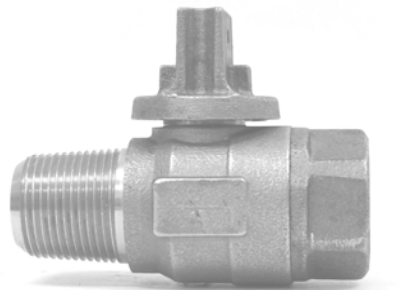

PART NUMBER	INLET AWWA	OUTLET FIP	WT. EACH	BOX QTY.
311-A3F3	3/4"	3/4"	1.8	10
311-A4F4	1"	1"	2.3	10
311-A6F6	1 1/2"	1 1/2"	6.5	2
311-A7F7	2"	2"	9.5	2

### AWWA x GRIPJOINT

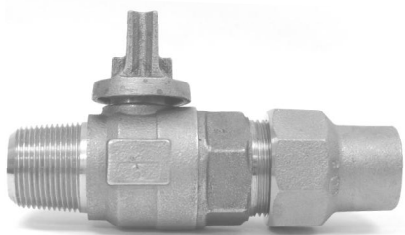


PART NUMBER	INLET AWWA	OUTLET GRIPJOINT	WT. EACH	BOX QTY.
311-A3GJ3	3/4"	3/4"	2.2	10
311-A4GJ4	1"	1"	3.4	6

\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING

# CORPORATION STOPS


## BALL STYLE WITH TEE HEAD

### AWWA x CB COMPRESSION

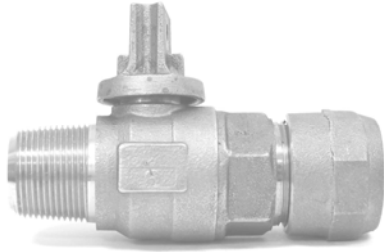


PART NUMBER	INLET AWWA	OUTLET CB COMPRESSION	WT. EACH	BOX QTY.
311-A3H3	3/4"	3/4"	2.3	10
311-A4H4	1"	1"	3.1	6
311-A5H5	1 1/4"	1 1/4"	8.9	2
311-A6H6	1 1/2"	1 1/2"	8.2	2
311-A6H7	1 1/2"	2"	9.0	2
311-A7H7	2"	2"	11.2	2

### AWWA x CB COMPRESSION ELECTRICAL CONNECTION

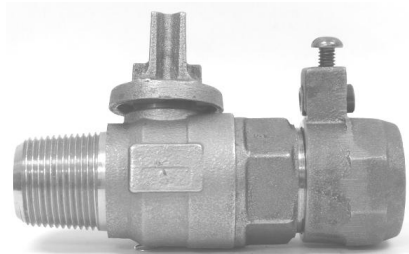


PART NUMBER	INLET AWWA	OUTLET CB COMPRESSION EL	WT. EACH	BOX QTY.
311-A3HE3	3/4"	3/4"	2.5	
311-A4HE4	1"	1"	3.5	6
311-A6HE6	1 1/2"	1 1/2"	8.5	2
311-A7HE7	2"	2"	11.7	2

### AWWA x KITEC

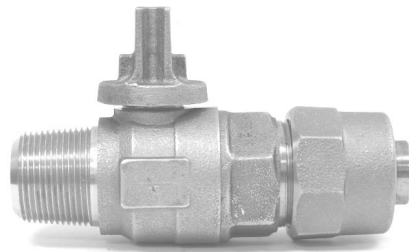

PART NUMBER	INLET AWWA	OUTLET KITEC	WT. EACH	BOX QTY.
311-A3K3	3/4"	3/4"	1.9	10
311-A4K4	1"	1"	2.9	6

### AWWA x MIP

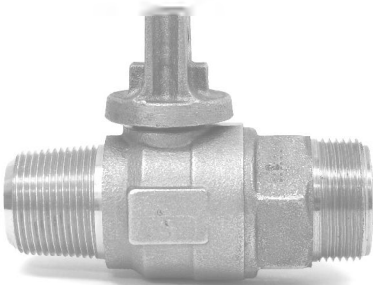


PART NUMBER	INLET AWWA	OUTLET MIP	WT. EACH	BOX QTY.
311-A3M3	3/4"	3/4"	1.9	10
311-A4M4	1"	1"	2.7	6
311-A6M6	1 1/2"	1 1/2"	7.2	2
311-A7M7	2"	2"	10.1	2

\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING

# CORPORATION STOPS


## BALL STYLE WITH TEE HEAD

### MIP x CAMPAK

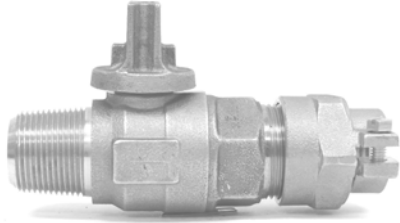


PART NUMBER	INLET MIP	OUTLET CAMPAK	WT. EACH	BOX QTY.
311-M3B3	3/4"	3/4"	2.3	10
311-M4B4	1"	1"	3.2	6
311-M6B6	1 1/2"	1 1/2"	8.1	
311-M7B7	2"	2"	10.5	2

### MIP x COPPER FLARE

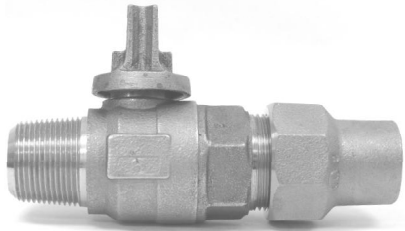


PART NUMBER	INLET MIP	OUTLET COPPER FLARE	WT. EACH	BOX QTY.
311-M3C3	3/4"	3/4"	2.1	10
311-M4C4	1"	1"	3.1	6
311-M6C6	1 1/2"	1 1/2"	8.8	2
311-M7C7	2"	2"	13.1	2

### MIP x FIP

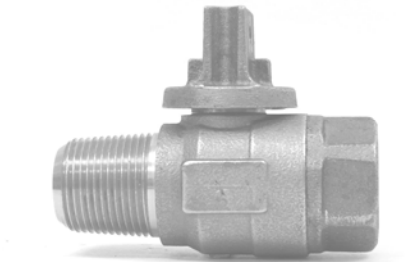

PART NUMBER	INLET MIP	OUTLET FIP	WT. EACH	BOX QTY.
311-M3F3	3/4"	3/4"	1.6	10
311-M4F4	1"	1"	2.3	10
311-M6F6	1 1/2"	1 1/2"	6.4	2
311-M7F7	2"	2"	9.1	2

### MIP x GRIPJOINT

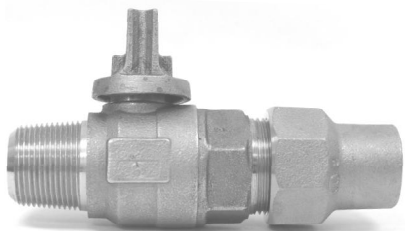


PART NUMBER	INLET MIP	OUTLET GRIPJOINT	WT. EACH	BOX QTY.
311-M3GJ3	3/4"	3/4"	2.2	10
311-M4GJ4	1"	1"	3.4	6

\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING

# CORPORATION STOPS


## BALL STYLE WITH TEE HEAD

### MIP x CB COMPRESSION

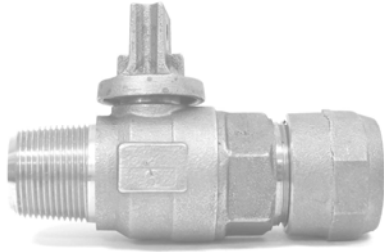


PART NUMBER	INLET MIP	OUTLET CB COMPRESSION	WT. EACH	BOX QTY.
311-M3H3	3/4"	3/4"	2.2	10
311-M4H4	1"	1"	3.1	6
311-M5H5	1 1/4"	1 1/4"	8.8	
311-M6H6	1 1/2"	1 1/2"	7.9	2
311-M6H7	1 1/2"	2"	8.8	2
311-M7H7	2"	2"	10.8	2

### MIP x CB COMPRESSION ELECTRICAL CONNECTION

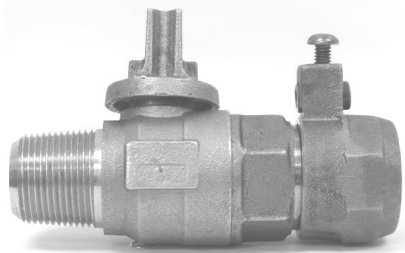


PART NUMBER	INLET MIP	OUTLET CB COMPRESSION EL	WT. EACH	BOX QTY.
311-M3HE3	3/4"	3/4"	2.4	
311-M4HE4	1"	1"	3.4	
311-M6HE6	1 1/2"	1 1/2"	8.5	
311-M7HE7	2"	2"	11.7	

### MIP x KITEC

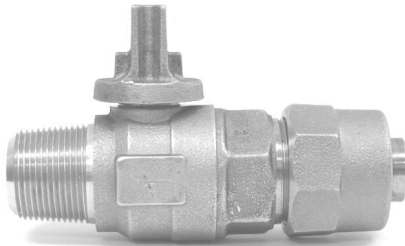

PART NUMBER	INLET MIP	OUTLET KITEC	WT. EACH	BOX QTY.
311-M3K3	3/4"	3/4"	2.2	10
311-M4K4	1"	1"	3.2	6

### MIP x MIP

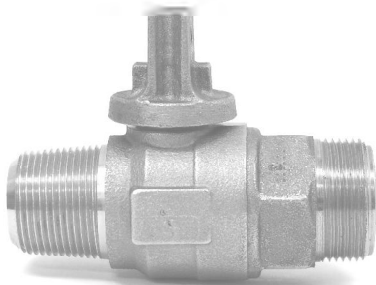

PART NUMBER	INLET MIP	OUTLET MIP	WT. EACH	BOX QTY.
311-M3M3	3/4"	3/4"	1.9	10
311-M4M4	1"	1"	2.5	6
311-M6M6	1 1/2"	1 1/2"	6.8	2
311-M7M7	2"	2"	9.3	2

\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING



# CORPORATION STOPS

## PARTS

### CORPORATION STOP REPLACEMENT FITTINGS

#### AWWA x CAMPAK



PART NUMBER	INLET AWWA	OUTLET CAMPAK	WT. EACH	BOX QTY.
305-A3B3	3/4"	3/4"	0.7	25
305-A4B4	1"	1"	1.0	15

#### AWWA x CB COMPRESSION



PART NUMBER	INLET AWWA	OUTLET CB COMPRESSION	WT. EACH	BOX QTY.
305-A3H3	3/4"	3/4"	0.7	25
305-A4H4	1"	1"	1.2	16

#### FEMALE COPPER FLARE x



PART NUMBER	INLET FEMALE COPPER FLARE	OUTLET COPPER FLARE	WT. EACH	BOX QTY.
306-P4C4	1"	1"	2.0	8
306-P6C6	1 1/2"	1 1/2"	6.1	6
306-P7C7	2"	2"	9.3	4

#### CORPORATION TAIL NUT x MALE IRON PIPE 1/4" BENDS



PART NUMBER	INLET	OUTLET MIP	WT. EACH	BOX QTY.
307-NY3M3	3/4"	3/4"		50
307-NY4M4	1"	1"		30
307-NY6M6	1 1/2"	1 1/2"		6
307-NY7M7	2"	2"		4

\* INSERTS ARE REQUIRED FOR OPTIMUM PERFORMANCE WHEN USING FLEXIBLE TUBING



Cambridge Brass, Inc., 140 Orion Place, Cambridge, Ontario warrants to the installing purchaser that products manufactured by Cambridge Brass are free from defects in material and/or workmanship for the lifetime of the product.\*

Effective with products produced March 1st, 2005 or thereafter Cambridge Brass will, at its option, repair or replace any part which proves to be defective in material and/or workmanship during the warranty period under approved installation, water and service conditions and use.

If Cambridge Brass concludes that the returned part was manufactured by Cambridge Brass and is, in fact, defective, then Cambridge brass will honor the warranty stated herein. LABOUR CHARGES AND/OR DAMAGED INCURRED IN INSTALLATION, REPAIR OR REPLACEMENT AS WELL AS CONSEQUENTIAL, SPECIAL, INDIRECT OR PUNITIVE DAMAGES CONNECTED THEREWITH ARE EXCLUDED AND WILL NOT BE PAID BY CAMBRIDGE BRASS.

This warranty is void in the event of any damage to the product due to uses other than those for which the product has been designed & promoted, abuse, neglect, accident, improper installation , any use other than the instructions furnished by Cambridge Brass or use of replacement parts other than genuine Cambridge parts.

The Lifetime Warranty terms described herein do not apply to plug (key) style valves or to any moving plastic parts such as check valves.

Cambridge Brass does warrant these parts for 5 years per the other terms of this Lifetime warranty.

This is the complete and exclusive warranty made by Cambridge Brass.

Cambridge Brass does not make any other warranty of any kind, including any implied warranties.

\*assumes a 40 year product life span.

