
Cambridge Brass P.D. Box 249 140 Orion Place Cambridge, Intario Canada NIR 5V1 Tel: (519) 621-5520 Fax: (519) 621-8674 http://www.cambridgebrass.com






MODEL NO. 212NL

CB COMPRESSION x METER YOKE NOSE

STRAIGHT METER VALVE - BALL STYLE FULL PORT WITH LOCKWING

FOR COPPER OR PLASTIC TUBING (CTS) x METER YOKE NOSE

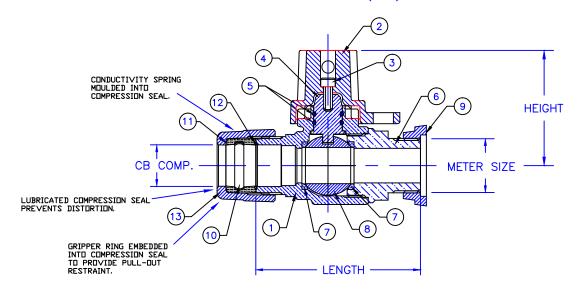

PARTS AND MATERIAL:

- PARTS AND MATERIAL:

 1. VALVE BODY: CAST BRASS, ALLOY C89833
 2. LOCKING CAP: CAST BRASS, ALLOY C83600
 3. CAP SCREW: STAINLESS STEEL, TYPE 304
 4. STEM: STAINLESS STEEL, TYPE 303
 5. O-RING: NITRILE RUBBER
 6. ENDBODY: CAST BRASS, ALLOY C89833
 7. SEATS: TEFLON
 8. BALL: CAST BRASS, ALLOY C89833
 9. STAR NUT: CAST BRASS, ALLOY C83600
 10. GRIPPER: STAINLESS STEEL, ALLOY 302
 11. COMPRESSION SEAL: EPDM
 12. CONDUCTOR SPRING: BRASS
 13. COMPRESSION NUT: CAST BRASS, ALLOY C83600

- FEATURES:

 MANUFACTURED IN COMPLIANCE WITH AWWA STANDARD C800
 (ASTM B-584, UNS NO C89833).

 CONFORMS TO ANSI/NSF 61-8

 CONFORMS TO ANSI/NSF 372 (COMPLIANT WITH US Safe Drinking Water Act. PL 111-380)
- CONFORMS TO ANSI/NSF 3/2 (COMPLIANT WITH US SATE DRINKING WATER ACT. PL 11 FLOW CAN BE IN EITHER DIRECTION.
 ROTATION STOPS RESISTS 200 FT—LB TORQUE.
 ENCAPSULATED LUGS UNDER CAP PROVIDE 90 DEGREE OPEN TO CLOSE OPERATION.
 BLOWOUT PROOF DESIGN.
 300 PSI WORKING PRESSURE.
 HOLE FOR ATTACHING HANDLE IS PROVIDED IN CAP.
 PADLOCK WING FOR LOCKING VALVE IN CLOSED POSITION.

ORDERING INFORMATION: FULL 360 ROTATION = ADD "R" TO END OF CATALOG NO. HANDLE = ADD "H" TO END OF CATALOG NO.

Cambridge Brass considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice.

VALVE SIZE	CATALOG NO.	CB COMP.	METER SIZE	LENGTH	HEIGHT	APPROX. WT. LBS.
3/4"	212NL-H3SR1	3/4"	5/8"	3.83"	2.50"	
3/4"	212NL-H3SR3	3/4"	5/8"x3/4" & 3/4"	3.83"	2.50"	
1"	212NL-H4SR4	1"	1"	4.42"	2.68"	

Submitted by: