

SUBMITTAL INFORMATION

COPPER SETTER 6031NL-2__H3H3-UQP



3/4" FULL PORT METER BALL VALVE BY DUAL CARTRIDGE CHECK VALVE

CB COMPRESSION x CB COMPRESSION FOR COPPER OR PLASTIC TUBING (CTS)

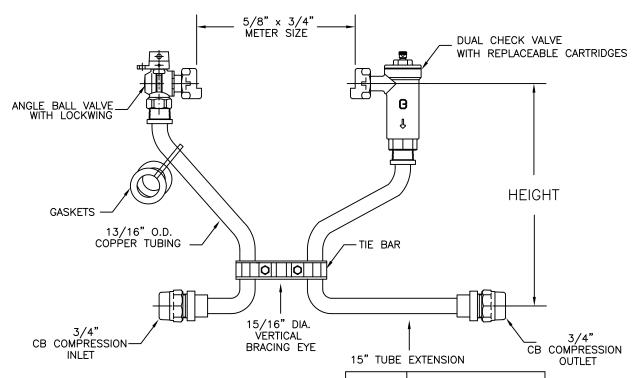

COPPER SETTER CATALOG NUMBERS

HEIGHT	CATALOG NUMBER
12"	6031NL-212H3H3-UQP
15"	6031NL-215H3H3-UQP
18"	6031NL-218H3H3-UQP
21"	6031NL-221H3H3-UQP
24"	6031NL-224H3H3-UQP

FEATURES:

- MANUFACTURED IN COMPLIANCE WITH AWWA STANDARD C800 (ASTM B-584, UNS NO C89833).
- CONFORMS TO ANSI/NSF 61-8
- CONFORMS TO ANSI/NSF 372 (COMPLIANT WITH US Safe Drinking Water Act. PL 111-380)
 SADDLE NUTS HOLD THE METER IN PLACE FOR TIGHTENING.
 13/16" O.D. COPPER RISERS PROVIDE MORE FLOW CAPACITY.
- ASSEMBLED WITH LEAD-FREE SOLDER.
- BRACING EYE IS STANDARD.

- POSITIONS THE METER DIRECTLY ABOVE THE CENTERLINE OF THE SERVICE.
 FURNISHED WITH TWO RUBBER GASKETS FOR METER
 CONSTRUCTED WITH TYPE K COPPER TUBING, ALLOY C12000 MANUFACTURED TO ASTM B88.
- ANGLE VALVE HAS PADLOCK WINGS FOR LOCKING VALVE IN CLOSED POSITION.
 FACTORY TESTED AT 90 PSI AIR PRESSURE UNDER WATER.
- METER SETTER IS SHIPPED WITH PLASTIC METER IDLER

Cambridge Brass considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice.

Cambridge Brass P.O. Box 249, 140 Orion Place Cambridge, Ontario Canada N1R 5V1 Tel: (519) 621-5520 Fax: (519) 621-8674 http://www.cambridgebrass.com



AUG. 2015

SUBMITTED BY: