


Cambridge Brass  
P.O. Box 249  
140 Orion Place  
Cambridge, Ontario  
Canada N1R 5V1  
Tel: (519) 621-5520  
Fax: (519) 621-8674  
http://www.cambridgebrass.com




MODEL NO. 111

CB COMPRESSION X  
FEMALE COMPRESSION

SERVICE INSULATOR

FOR PROTECTION AGAINST SERVICE LINE ELECTROLYSIS

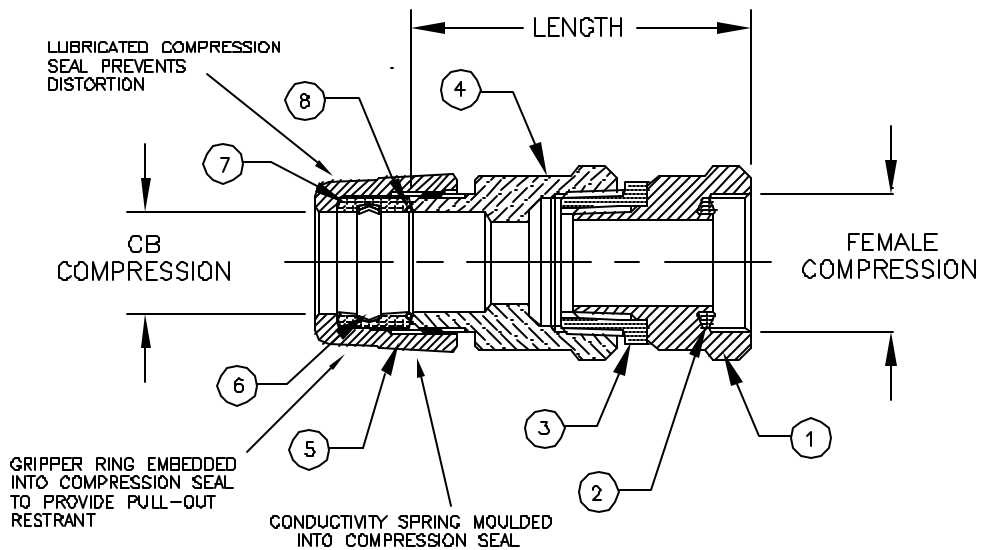

- PARTS AND MATERIAL:
- 1. FEMALE COMPRESSION BODY: CAST BRASS, ALLOY C83600
  - 2. SEAL: NITRILE RUBBER
  - 3. INSULATOR: NYLON
  - 4. INSULATOR BODY: CAST BRASS, ALLOY C83600
  - 5. COMPRESSION NUT: CAST BRASS, ALLOY C83600
  - 6. GRIPPER: STAINLESS STEEL, ALLOY 302
  - 7. COMPRESSION SEAL: NITRILE RUBBER
  - 8. CONDUCTOR SPRING: BRASS

FEATURES:  
- MANUFACTURED IN COMPLIANCE WITH AWWA STANDARD C800-05 (ASTM B-62 AND ASTM B-584, UNS NO C83600-85-5-5-5).  
- <X> CSA CLASSIFIED TO ANSI/NSF STANDARD 61-8.

\* WILL FIT CB COMPRESSION OR MUELLER 110 COMPRESSION THREADS ONLY

Cambridge Brass considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice.

SIZE	CATALOG NO.	CB COMP. SIZE	FEM. COMP. SIZE	LENGTH	APPROX. WT. LBS.	CLASSIFIED NSF 61-8
3/4"	111-H303	3/4"	3/4"	2.8"	1.3	<X>
1"	111-H404	1"	1"	3.9"	2.5	<X>
1 1/2"	111-H606	1 1/2"	1 1/2" *	4.9"	5.7	<X>
2"	111-H707	2"	2" *	5.9"	9.2	

Submitted by: