


3/4" REDUCED PORT METER BALL VALVE INLET AND DUAL CHECK VALVE OUTLET

SERVICE CONNECTION: 3/4" CTS CB COMPRESSION INLET AND OUTLET

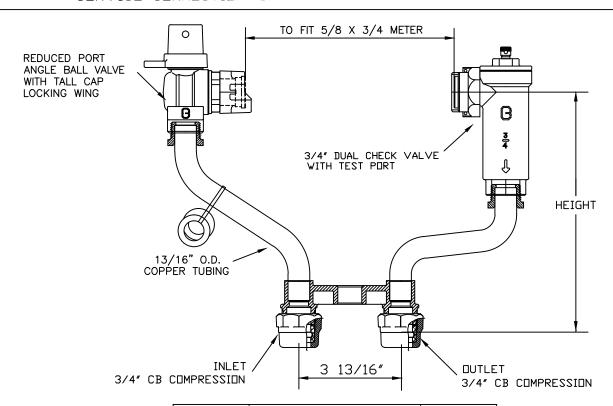

HEIGHT	CATALOG NUMBER	
7″	6040NL-207H3H3-VQP	
9″	6040NL-209H3H3-VQP	
12"		
15″		

FEATURES:

- ALL COMPONENTS CONFORM TO AVWA C800-05
 - (ASTM B-584, UNS NO C89833 FOR BRASS PARTS IN CONTACT WITH POTABLE WATER, AND ASTM B-62 AND B-584, UNS NO C83600 FOR ALL OTHER BRASS PARTS).
- METER SWIVEL SADDLE NUTS HOLD THE METER IN PLACE FOR TIGHTENING.
- TIE BAR IS STANDARD FOR 18" AND TALLER METER SETTER HEIGHTS.
- 1" OD COPPER TUBE RISERS. ASSEMBLED WITH LEAD-FREE SOLDER.

- VERTICAL BRACING EYE IS STANDARD. CONSTRUCTED WITH TYPE K COPPER TUBING, ALLOY C1200 MANUFACTURED TO ASTM B88.
- NITRILE METER GASKETS PROVIDED
- ANGLE VALVE HAS PADLOCK WINGS FOR LOCKING VALVE IN CLOSED POSITION. FACTORY TESTED AT 90 PSI AIR PRESSURE UNDER WATER.

Cambridge Brass P.D. Box 249, 140 Orion Place Cambridge, Ontario Canada N1R 5V1 Tel: (519) 621-5520 Fax: (519) 621-8674 http://www.cambridgebrass.com



SUBMITTED BY:

APRIL 2014