


SUBMITTAL INFORMATION

CORNER SETTER 7020NL-3H3PJ3-VO

3/4" METER WITH REDUCED PORT LOCKING BALL VALVE ON INLET

INLET-CB COMPRESSION FOR CTS TUBE X OUTLET-CAMPAK FOR 3/4" IPS OD PIPE

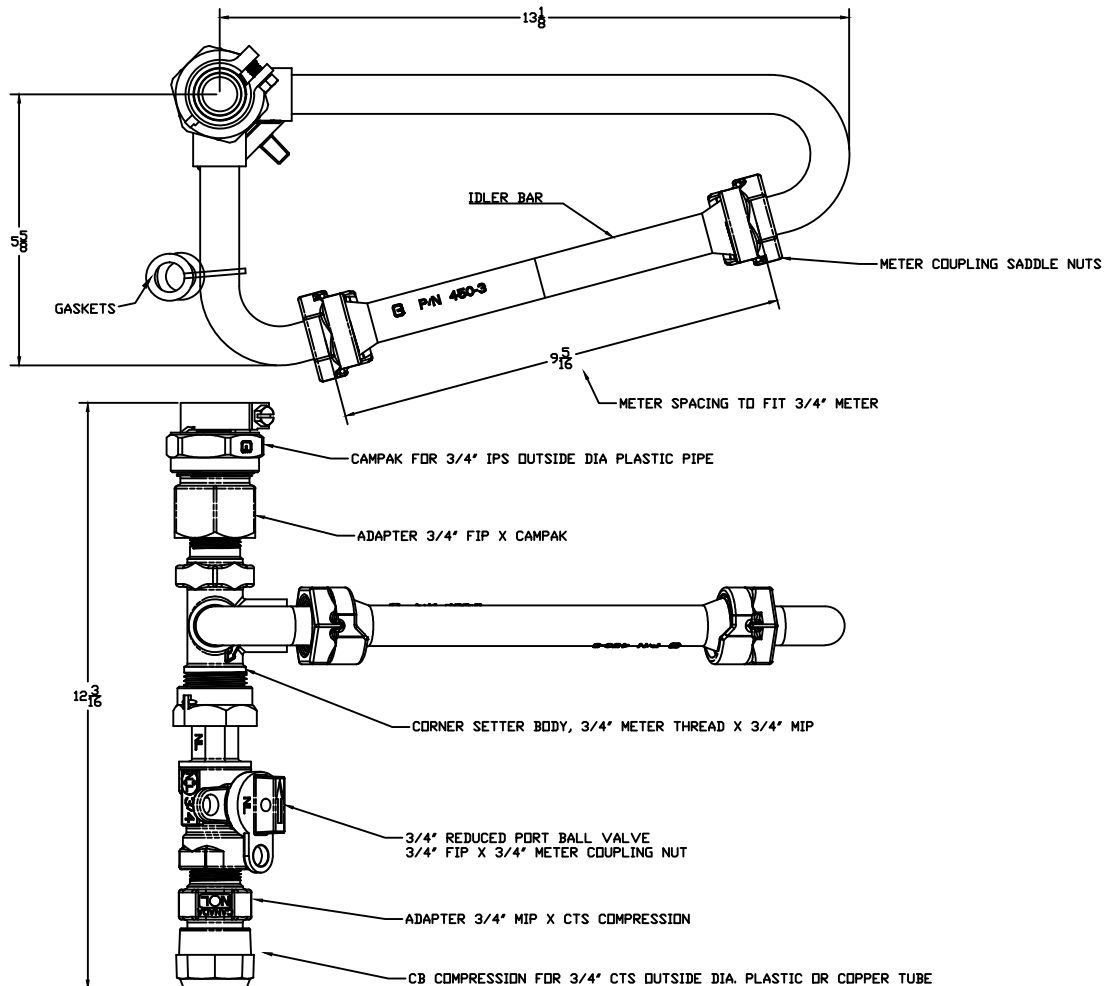

FEATURES:

- ALL COMPONENTS CONFORM TO AWWA C800-05 (ASTM B-584, UNS NO C89833 FOR BRASS PARTS IN CONTACT WITH POTABLE WATER, AND ASTM B-62 AND B-584, UNS NO C83600 FOR ALL OTHER BRASS PARTS).
- SADDLE NUTS HOLD THE METER IN PLACE FOR TIGHTENING.
- 13/16" O.D. COPPER RISERS PROVIDE MORE FLOW CAPACITY.
- ASSEMBLED WITH LEAD FREE SOLDER.
- CONSTRUCTED WITH TYPE K COPPER TUBING, ALLOY C12200 MANUFACTURED TO ASTM 88.
- FACTORY TESTED AT 90 PSI AIR PRESSURE UNDER WATER.
- POSITIONS THE METER DIRECTLY ABOVE THE CENTERLINE OF THE SERVICE.
- THREAD PROTECTORS ARE STANDARD
- METER IDLER BAR STANDARD
- FURNISHED WITH TWO NITRILE RUBBER GASKETS FOR METER NUTS

Cambridge Brass considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice.

Cambridge Brass
 P.O. Box 249, 140 Orion Place
 Cambridge, Ontario
 Canada N1R 5V1
 Tel: (519) 621-5520
 Fax: (519) 621-8674
<http://www.cambridgebrass.com>



REV A - AUGUST 2012

SUBMITTED BY: